


Sintered Neodymium-Iron-Boron Magnets

These are also referred to as "Neo" or NdFeB magnets. They offer a combination of high magnetic output at moderate cost. Please contact Arnold for additional grade information and recommendations for protective coating. Assemblies using these magnets can also be provided.

Characteristic	Units	Magnetic Properties		
		min.	nominal	max.
Br , Residual Induction	Gauss	10,200	10,750	11,300
	mT	1020	1075	1130
H_{cB} , Coercivity	Oersteds	9,800	10,300	10,800
	kA/m	780	820	859
H_{cJ} , Intrinsic Coercivity	Oersteds	34,000		
	kA/m	2,706		
BHmax , Maximum Energy Product	MGOe	25	28	31
	kJ/m ³	199	223	247

Characteristic	Units	Thermal Properties	
		C //	C ⊥
Reversible Temperature Coefficients ⁽¹⁾			
	of Induction, α(Br)	%/°C	-0.12
	of Coercivity, α(H _{cj})	%/°C	-0.45
Coefficient of Thermal Expansion ⁽²⁾	ΔL/L per °Cx10 ⁻⁶	7	-1
Thermal Conductivity	kcal/mhr°C	5.3	5.8
Specific Heat ⁽³⁾	cal/g°C	0.11	
Curie Temperature, T _c	°C	310	
Other Properties	Flexural Strength	psi	41,300
		MPa	285
	Density	g/cm ³	7.6
	Hardness, Vickers	Hv	620
	Electrical Resistivity, ρ	μΩ • cm	150 // 130 ⊥

Notes:
 (1) Coefficients measured between 20 and 220 °C
 (2) Between 20 and 200 °C. Values are typical and can vary.
 (3) Between 20 and 140 °C

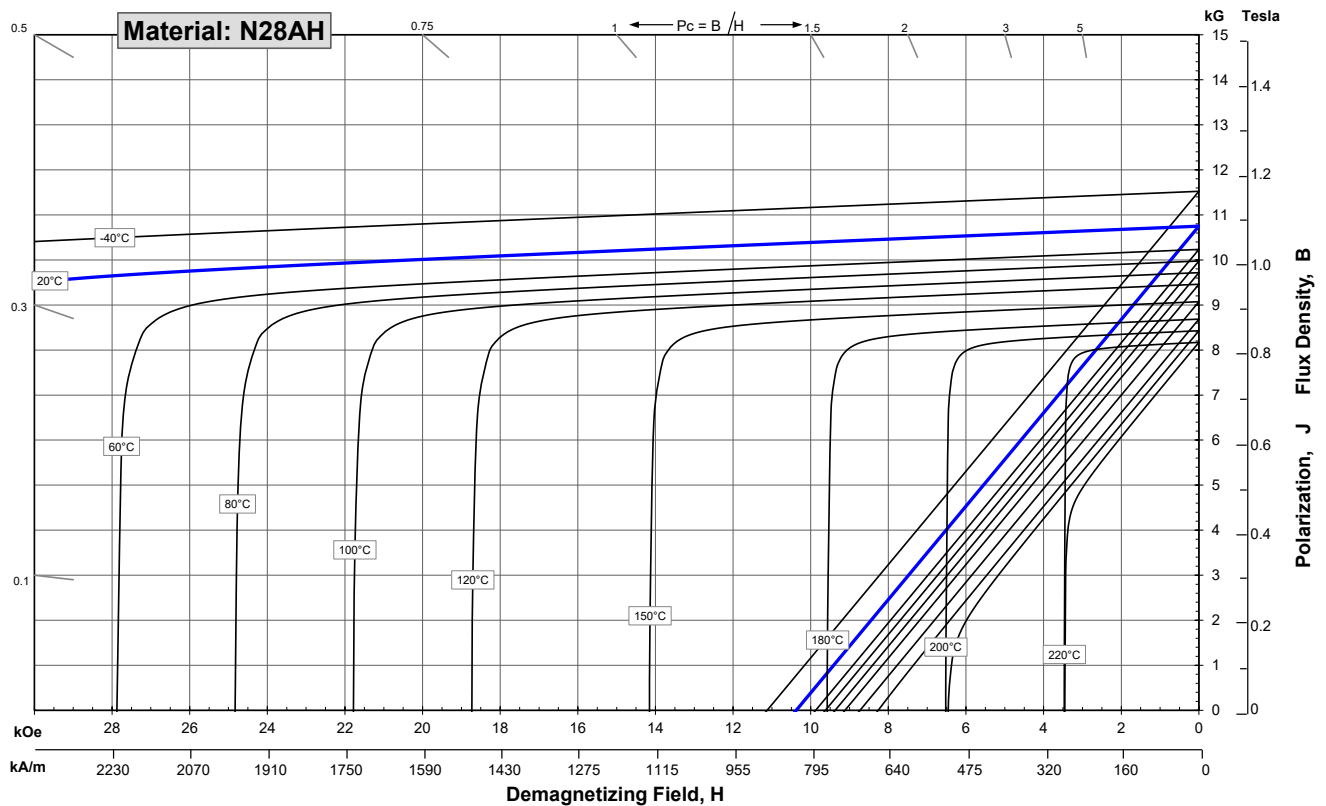

Notes The material data and demagnetization curves shown above represent typical properties that may vary due to product shape and size. **Demagnetization curves show nominal Br and minimum H_{cj}.** Magnets can be supplied thermally stabilized or magnetically calibrated to customer specifications. Additional grades are available. Please contact the factory for information.