


## Sintered Neodymium-Iron-Boron Magnets

These are also referred to as "Neo" or NdFeB magnets. They offer a combination of high magnetic output at moderate cost. Please contact Arnold for additional grade information and recommendations for protective coating. Assemblies using these magnets can also be provided.

Magnetic Properties	Characteristic	Units	min.	nominal	max.
	<b>Br</b> , Residual Induction		Gauss	14,200	14,500
		mT	1420	1450	1480
<b>H<sub>cB</sub></b> , Coercivity		Oersteds	10,500	12,300	14,100
		kA/m	836	979	1122
<b>H<sub>cJ</sub></b> , Intrinsic Coercivity		Oersteds	11,000		
		kA/m	875		
<b>BHmax</b> , Maximum Energy Product		MGOe	49	51	53
		kJ/m <sup>3</sup>	390	406	422

Thermal Properties	Characteristic	Units	C //	C ⊥
	Reversible Temperature Coefficients <sup>(1)</sup>	of Induction, α(Br)	%/°C	
of Coercivity, α(H <sub>cj</sub> )		%/°C		-0.62
Coefficient of Thermal Expansion <sup>(2)</sup>		ΔL/L per °Cx10 <sup>-6</sup>	7	-1
	Thermal Conductivity	kcal/mhr°C	5.3	5.8
Specific Heat <sup>(3)</sup>		cal/g°C	0.11	
Curie Temperature, T <sub>c</sub>		°C	310	
Other Properties	Flexural Strength	psi	41,300	
		MPa	285	
	Density	g/cm <sup>3</sup>	7.6	
	Hardness, Vickers	Hv	620	
	Electrical Resistivity, ρ	μΩ • cm	150 // 130 ⊥	

Notes:  
 (1) Coefficients measured between 20 and 60 °C  
 (2) Between 20 and 200 °C. Values are typical and can vary.  
 (3) Between 20 and 140 °C

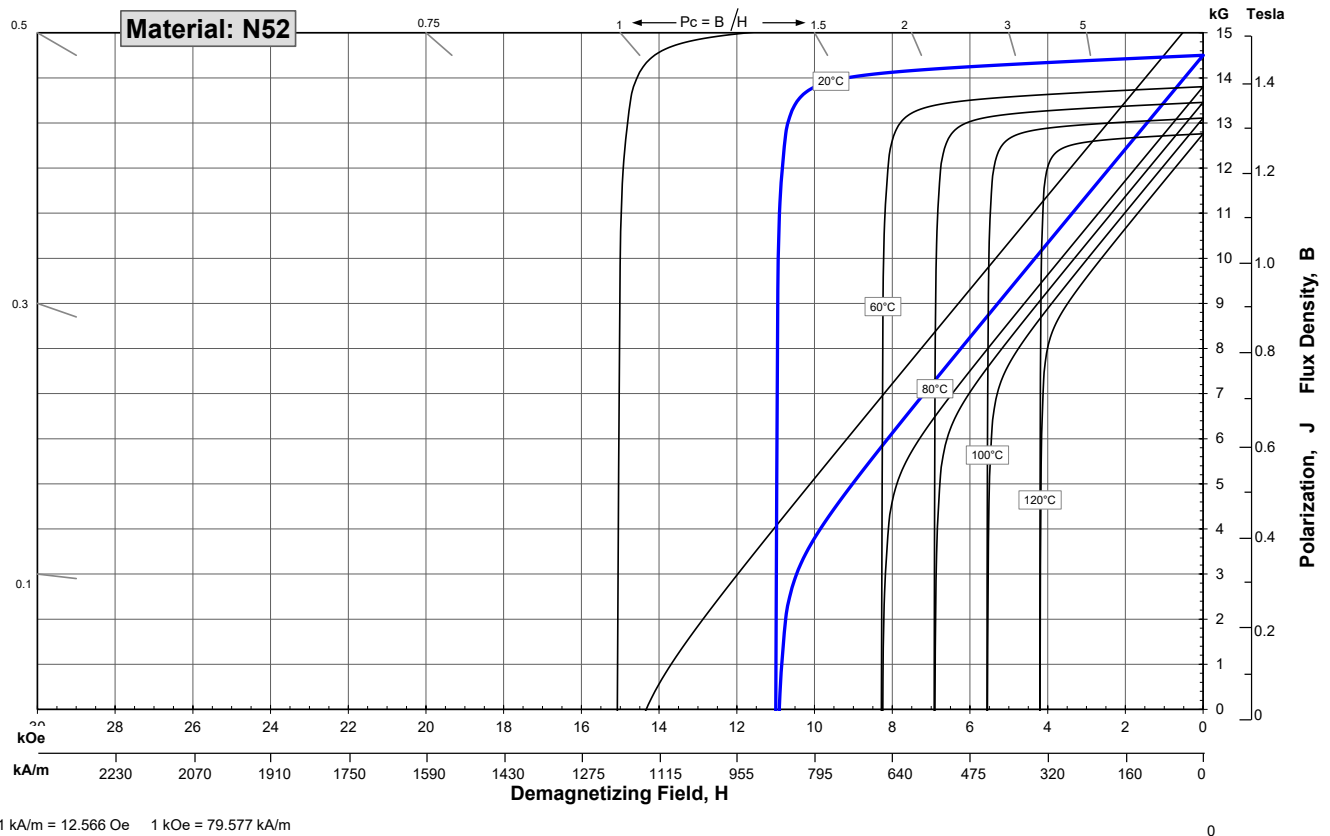

**Notes** The material data and demagnetization curves shown above represent typical properties that may vary due to product shape and size. **Demagnetization curves show nominal Br and minimum Hci.** Magnets can be supplied thermally stabilized or magnetically calibrated to customer specifications. Additional grades are available. Please contact the factory for information.