


Sintered Neodymium-Iron-Boron Magnets

These are also referred to as "Neo" or NdFeB magnets. They offer a combination of high magnetic output at moderate cost. Please contact Arnold for additional grade information and recommendations for protective coating. Assemblies using these magnets can also be provided.

Characteristic	Units	min. nominal max.		
Br , Residual Induction	Gauss	11,700	12,100	12,500
	mT	1170	1210	1250
H_{cB} , Coercivity	Oersteds	11,000	11,500	12,000
	kA/m	876	915	955
H_{cJ} , Intrinsic Coercivity	Oersteds	20,000		
	kA/m	1,592		
BH_{max} , Maximum Energy Product	MGOe	33	36	38
	kJ/m ³	263	283	302

Characteristic	Units	C //	C ⊥
Thermal Properties	Reversible Temperature Coefficients ⁽¹⁾		
	of Induction, α(Br)	%/°C	-0.1
	of Coercivity, α(H _{cj})	%/°C	-0.55
	Coefficient of Thermal Expansion ⁽²⁾	ΔL/L per °C x 10 ⁻⁶	7 -1
	Thermal Conductivity	kcal/mh°C	5.3 5.8
	Specific Heat ⁽³⁾	cal/g°C	0.11
	Curie Temperature, T _c	°C	350
Other Properties	Flexural Strength	psi	41,300
		MPa	285
	Density	g/cm ³	7.6
	Hardness, Vickers	Hv	620
	Electrical Resistivity, ρ	μΩ • cm	150 // 130 ⊥

Notes: (1) Coefficients measured between 20 and 150 °C
(2) Between 20 and 200 °C. Values are typical and can vary.
(3) Between 20 and 140 °C

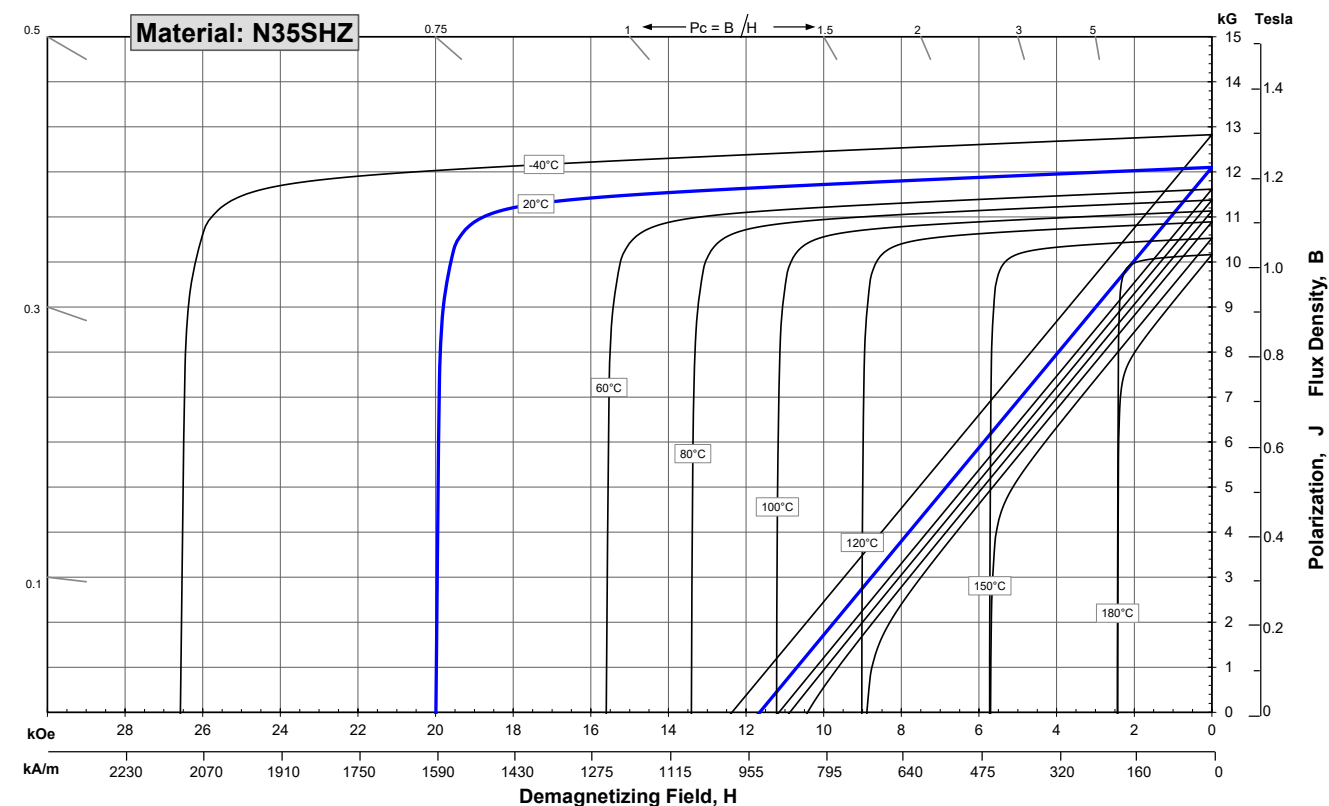

Notes The material data and demagnetization curves shown above represent typical properties that may vary due to product shape and size.
Demagnetization curves show nominal Br and minimum H_{cj}.
Magnets can be supplied thermally stabilized or magnetically calibrated to customer specifications.
Additional grades are available. Please contact the factory for information.