


Sintered Neodymium-Iron-Boron Magnets

These are also referred to as "Neo" or NdFeB magnets. They offer a combination of high magnetic output at moderate cost. Please contact Arnold for additional grade information and recommendations for protective coating. Assemblies using these magnets can also be provided.

Characteristic	Units	min.	nominal	max.
Br , Residual Induction	Gauss	12,800	13,100	13,400
	mT	1280	1310	1340
H_{cB} , Coercivity	Oersteds	12,000	12,400	12,800
	kA/m	955	987	1019
H_{cJ} , Intrinsic Coercivity	Oersteds	20,000		
	kA/m	1,592		
BH_{max} , Maximum Energy Product	MGOe	39	42	44
	kJ/m ³	310	330	350

Characteristic	Units	C //	C ⊥
Thermal Properties	Reversible Temperature Coefficients ⁽¹⁾		
	of Induction, α(Br)	%/°C	-0.11
	of Coercivity, α(H _{cJ})	%/°C	-0.55
Other Properties	Coefficient of Thermal Expansion ⁽²⁾	ΔL/L per °C x 10 ⁻⁶	7 -1
	Thermal Conductivity	kcal/mhr°C	5.3 5.8
	Specific Heat ⁽³⁾	cal/g°C	0.11
	Curie Temperature, T _c	°C	330
	Flexural Strength	psi	41,300
		MPa	285
	Density	g/cm ³	7.6
	Hardness, Vickers	Hv	620
	Electrical Resistivity, ρ	μΩ • cm	150 // 130 ⊥

Notes: (1) Coefficients measured between 20 and 150 °C
(2) Between 20 and 200 °C. Values are typical and can vary.
(3) Between 20 and 140 °C

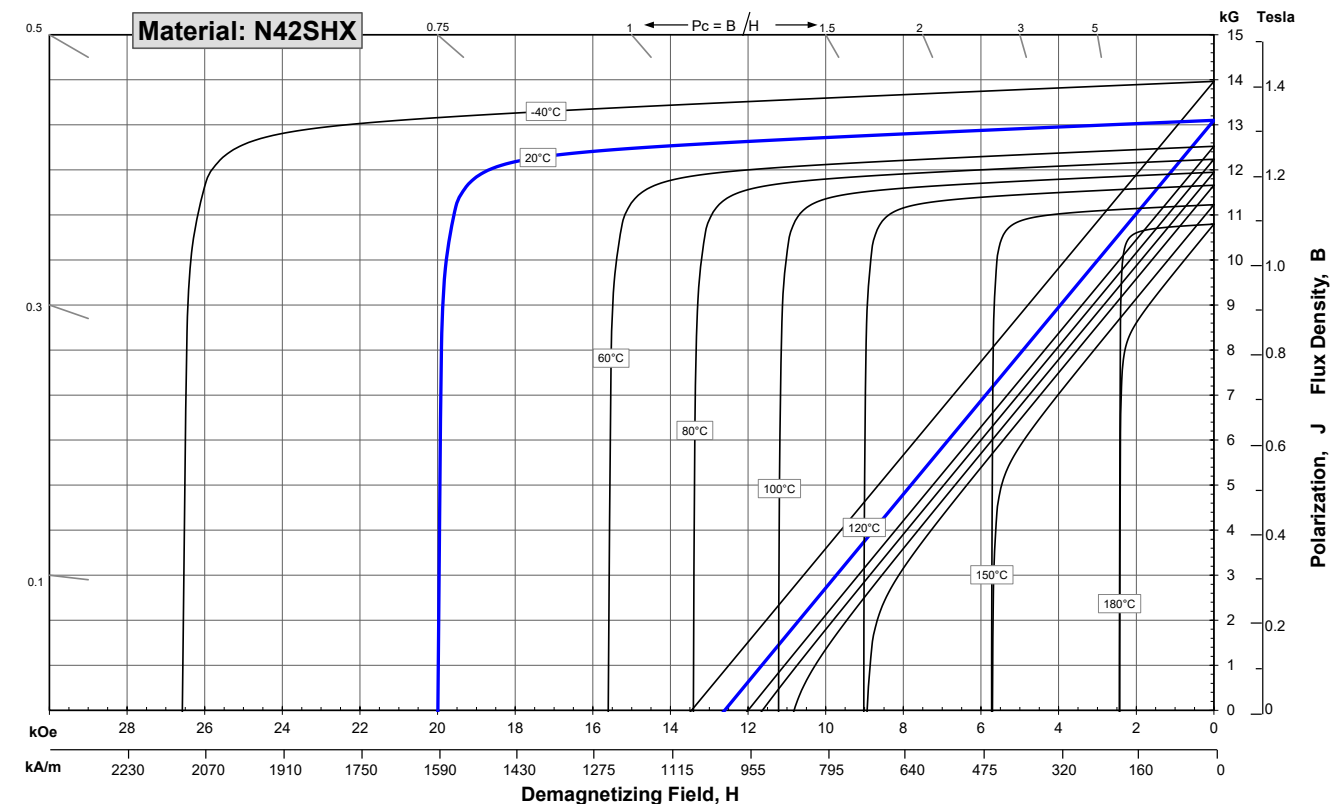

1 kA/m = 12.566 Oe 1 kOe = 79.577 kA/m

Notes The material data and demagnetization curves shown above represent typical properties that may vary due to product shape and size.

Demagnetization curves show nominal Br and minimum H_{cJ}.

Magnets can be supplied thermally stabilized or magnetically calibrated to customer specifications.

Additional grades are available. Please contact the factory for information.