


Sintered Neodymium-Iron-Boron Magnets

These are also referred to as "Neo" or NdFeB magnets. They offer a combination of high magnetic output at moderate cost. Please contact Arnold for additional grade information and recommendations for protective coating. Assemblies using these magnets can also be provided.

Characteristic	Units	Magnetic Properties		
		min.	nominal	max.
Br , Residual Induction	Gauss	12,100	12,350	12,600
	mT	1210	1235	1260
H_{cB} , Coercivity	Oersteds	11,500	11,750	12,000
	kA/m	915	935	955
H_{cJ} , Intrinsic Coercivity	Oersteds	37,000		
	kA/m	2,945		
BH_{max} , Maximum Energy Product	MGOe	36	39	41
	kJ/m ³	287	307	326

Characteristic	Units	Thermal Properties	
		C //	C ⊥
Reversible Temperature Coefficients ⁽¹⁾			
	of Induction, α(Br)	%/°C	-0.12
	of Coercivity, α(H _{cj})	%/°C	-0.47
Coefficient of Thermal Expansion ⁽²⁾	ΔL/L per °Cx10 ⁻⁶	7	-1
Thermal Conductivity	kcal/mhr°C	5.3	5.8
Specific Heat ⁽³⁾	cal/g°C	0.11	
Curie Temperature, T _c	°C	310	
Flexural Strength	psi	41,300	
	MPa	285	
Density	g/cm ³	7.6	
Hardness, Vickers	Hv	620	
Electrical Resistivity, ρ	μΩ • cm	150 // 130 ⊥	

Notes:
 (1) Coefficients measured between 20 and 200 °C
 (2) Between 20 and 200 °C. Values are typical and can vary.
 (3) Between 20 and 140 °C

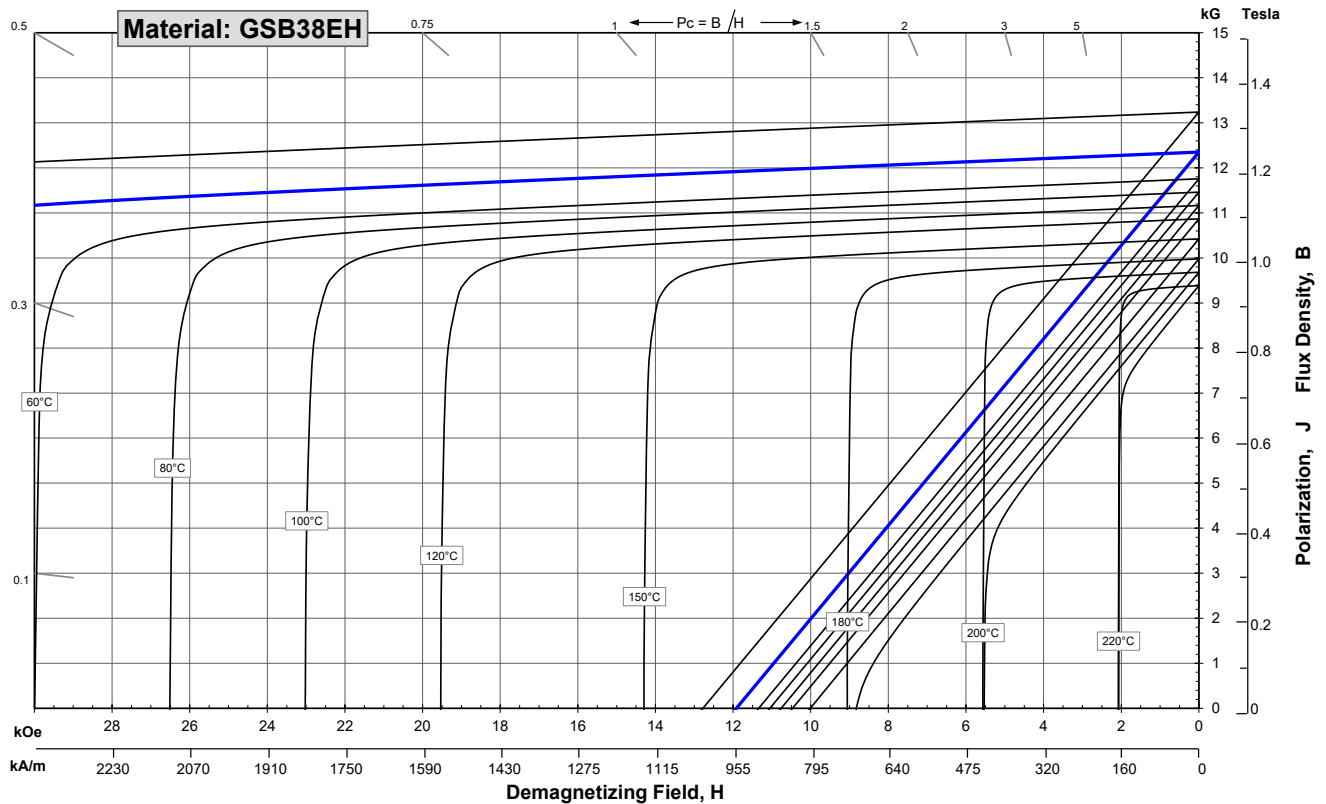

1 kA/m = 12.566 Oe 1 kOe = 79.577 kA/m

Notes The material data and demagnetization curves shown above represent typical properties that may vary due to product shape and size. **Demagnetization curves show nominal Br and minimum H_{cj}.** Magnets can be supplied thermally stabilized or magnetically calibrated to customer specifications. Additional grades are available. Please contact the factory for information.