


Sintered Neodymium-Iron-Boron Magnets

These are also referred to as "Neo" or NdFeB magnets. They offer a combination of high magnetic output at moderate cost. Please contact Arnold for additional grade information and recommendations for protective coating. Assemblies using these magnets can also be provided.

Characteristic	Units	Magnetic Properties		
		min.	nominal	max.
Br , Residual Induction	Gauss	13,000	13,200	13,400
	mT	1300	1320	1340
H_{cB} , Coercivity	Oersteds	12,300	12,550	12,800
	kA/m	979	999	1019
H_{cJ} , Intrinsic Coercivity	Oersteds	35,000		
	kA/m	2,786		
BH_{max} , Maximum Energy Product	MGOe	41	44	46
	kJ/m ³	326	346	366

Characteristic	Units	Thermal Properties	
		C //	C ⊥
Reversible Temperature Coefficients ⁽¹⁾			
	of Induction, α(Br)	%/°C	-0.12
	of Coercivity, α(H _{cj})	%/°C	-0.47
Coefficient of Thermal Expansion ⁽²⁾	ΔL/L per °Cx10 ⁻⁶	7	-1
Thermal Conductivity	kcal/mhr°C	5.3	5.8
Specific Heat ⁽³⁾	cal/g°C	0.11	
Curie Temperature, T _c	°C	310	
Flexural Strength		psi	41,300
		MPa	285
Density	g/cm ³	7.6	
Hardness, Vickers	Hv	620	
Electrical Resistivity, ρ	μΩ • cm	150 // 130 ⊥	

Notes:
 (1) Coefficients measured between 20 and 200 °C
 (2) Between 20 and 200 °C. Values are typical and can vary.
 (3) Between 20 and 140 °C

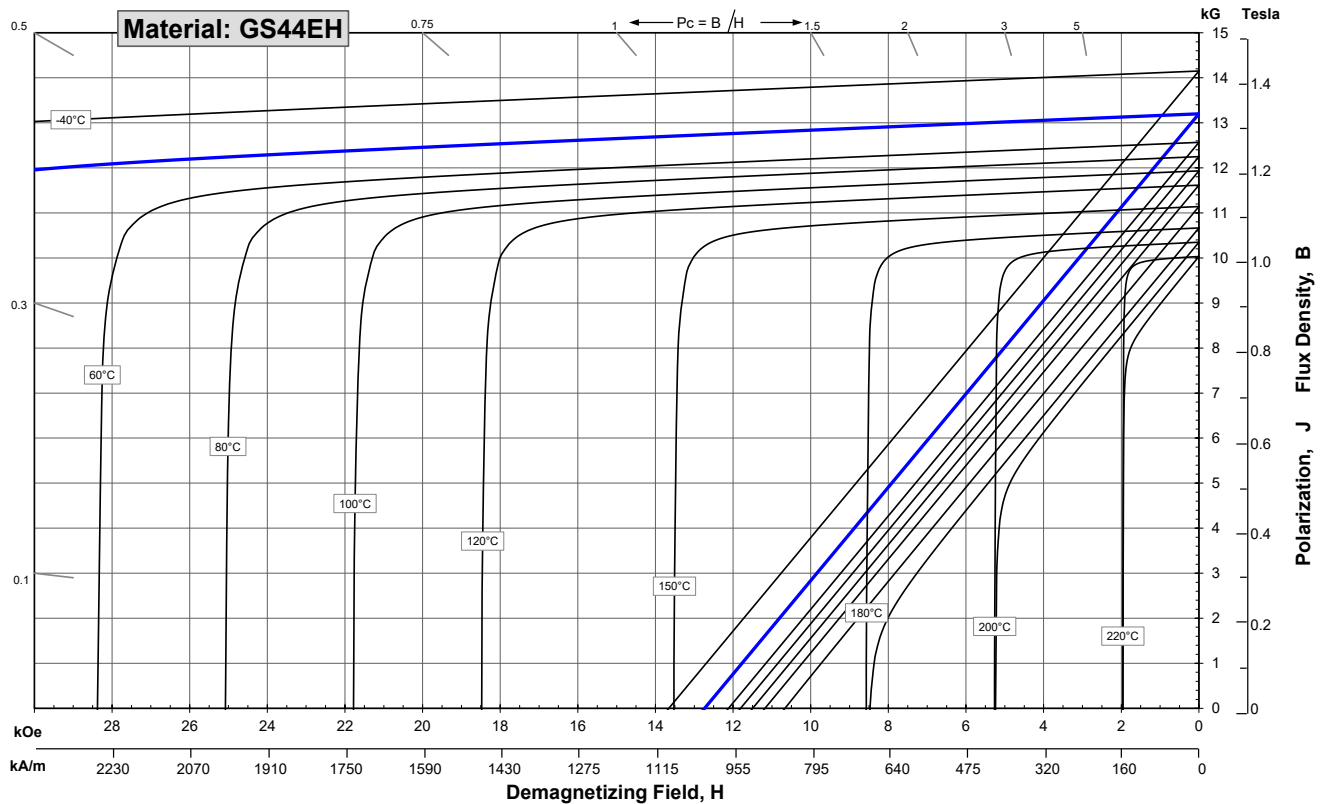

1 kA/m = 12.566 Oe 1 kOe = 79.577 kA/m

Notes The material data and demagnetization curves shown above represent typical properties that may vary due to product shape and size.
Demagnetization curves show nominal Br and minimum H_{cj}.
 Magnets can be supplied thermally stabilized or magnetically calibrated to customer specifications.
 Additional grades are available. Please contact the factory for information.